



Profil tubulaire à lèvre aluminium 6060T5 lg 3 - 6 m

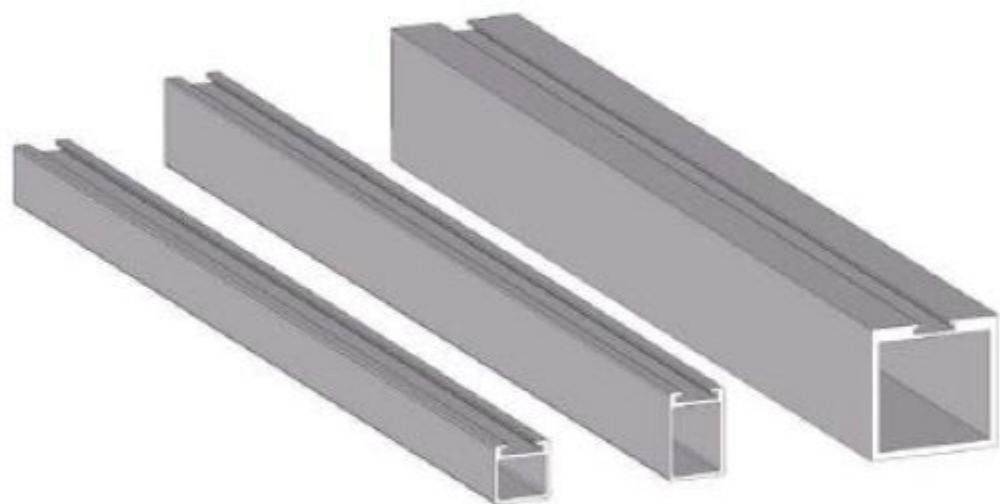

ROCAMAXX 40

ROCAMAXX 60

ROCAMAXX 90

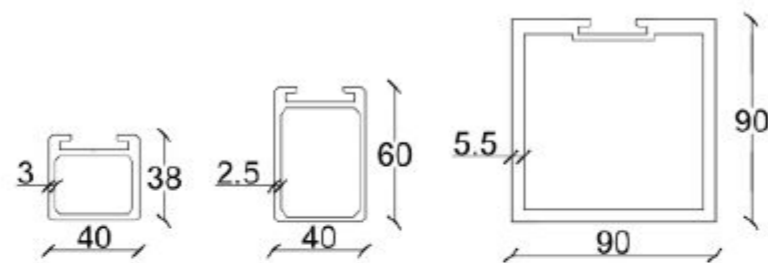

Désignation	Inertie	Module de flexion
	I (cm4)	I/V(cm3)
ROCAMAXX 40	8.62	4.42
ROCAMAXX 60	28.19	9.39
ROCAMAXX 90	220,41	48,9